UC50e

High Temp Undercounter Dishwasher And Glasswasher

FEATURES:

- **Energy Star Qualified.**
- 30 racks / 120 covers per hour.
- Fully automatic cycle for easy operation
- Built-in detergent and rinse chemical pumps.
- Pump drain allows for multiple installation applications including elevated drains.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.
- Built-in 6 kW booster heater
- 2.7 kW wash tank heater.
- Double skin stainless steel provides consistent heating and a quiet operation.
- Low 0.8 US gal. water usage per rack.
- Door and water level safety switches, plus booster safety thermostat.
- Stainless steel safety filters protect wash pump.
- Polished stainless steel surface and tanks with rounded corners for a total and easy cleaning.
- Operator friendly, removable wash and rinse arms allows for easy cleaning.
- Triple filtering protection system, captures excess soil and debris.

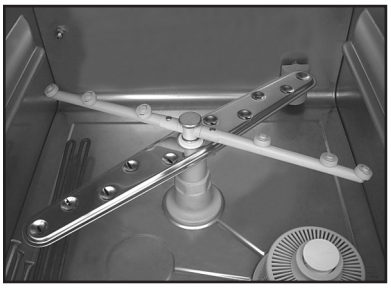

Upper and lower wash and rinse arms guarantee excellent results.

Large 13" maximum loading height door clearance accommodates oversized plates, glasses and utensils.

Built-in detergent and rinse chemical pumps.

Top mounted controls are easy to read and simple to operate.

CMA EnergyMizer® Registered Trademark

CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841• 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

Printed in the U.S.A.

© 10-2014 CMA, Inc.

UC50e

High Temp Undercounter Dishwasher And Glasswasher

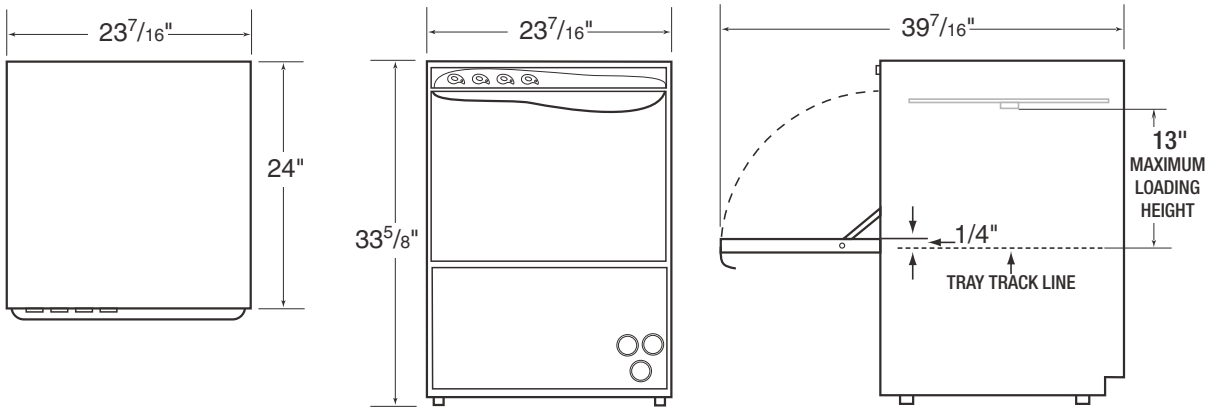

Specifications:

MODEL UC50e	USA	METRIC
WATER CONSUMPTION		
PER RACK	.8 GAL	(3L)
PER HOUR	24/16 GAL	(90/60L)
OPERATING CYCLE		
WASH TIME-SEC	100/160	100/160
RINSE TIME-SEC	15/15	15/15
DWELL-SEC	5/5	5/5
TOTAL CYCLE-SEC	120/180	120/180
OPERATING CAPACITY		
RACKS PER HOUR	30/20	30/20
WASH TANK CAPCITY	6.87 GAL	(26L)
WATER REQUIRMENTS	140°F	(60°C)
WATER INLET	3/4"	
DRAIN CONNECTION	1"	
RINSE PRESSURE SET	24 PSI	1.7kg/cm²
CYCLE TEMPERATURES		
WASH-°F	155°F-160°F	(68°C/71°C)
RINSE-°F	180°F-195°F	(82°C/90°C)

	USA	METRIC
FRAME DIMENSIONS		
DEPTH	24"	(61 CM)
WIDTH	23-7/16"	(59.5 CM)
HEIGHT	33-5/16"	(84.5 CM)
MAXIMUM LOADING HEIGHT	13"	(33 CM)
STANDARD DISHRACK DIMENSIONS	1 19-3/4"X19-3/4"	1 (50X50CM)
SHIPPING WEIGHT	165#	75(KG)
WASH PUMP MOTORS HP	3/4HP	
HEATERS		
WASH TEMP HEATER	2.7kW / 2.94kW	
BOOSTER HEATER	6kW / 6.53kW	

ELECTRICAL RATING (TOTAL AMPERAGE DRAWN)	VOLTS	PHASE	AMPS
	208	1	28
	230	1	30

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

Summary Specifications:

The UC50e dishwasher and glasswasher is a front loading machine designed to produce sparkling clean glasses and dishes. Constructed of double walled stainless steel skin providing constant heating and a quiet operation. Standard features include upper and lower wash/rinse arms and wash and booster tank heater. Features include 13" maximum loading height, standard liquid detergent rinse-aid dispenser.

KROMO BRANDS
Distributed exclusively by CMA Dishmachines

CMA Energy Mizer® Registered Trademark

ENERGY STAR

ENERGY STAR PARTNER

CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841• 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

Printed in the U.S.A.

© 10-2014 CMA, Inc.